


KoskiBond

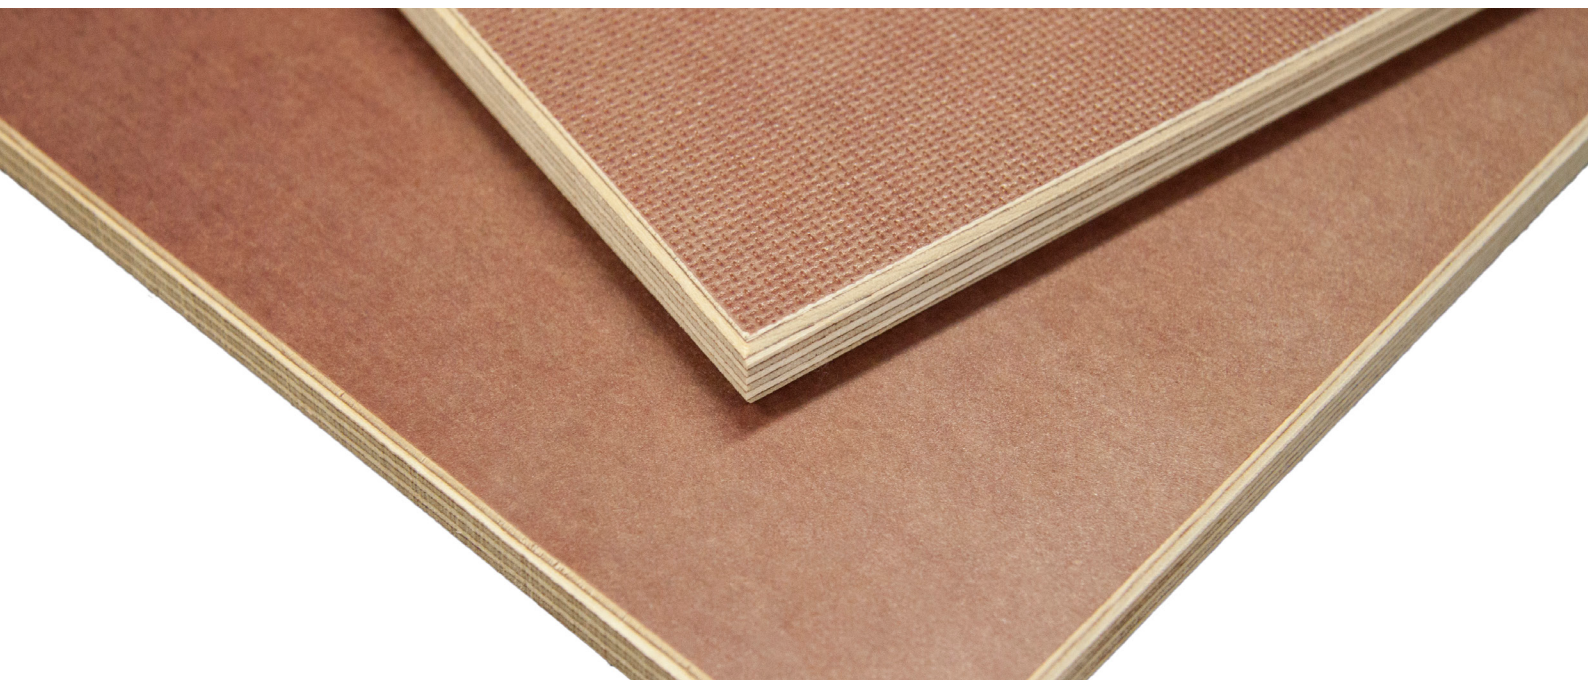

A strong bond

KoskiBond is a coated plywood panel, offering an innovative “easy to bond” solutions. KoskiBond is made of Finnish birch plywood and is designed to provide excellent physical bonding properties for industrial adhesives and paints. One or both sides of the board are coated with the customised surface, providing a high bond strength for a wide range of adhesives and paints.

KoskiBond is an ideal material for solid glued constructions and components. The factory applied KoskiBond film makes gluing easy and fast. The smooth and hard wearing surfaces are ready to use for both exterior and interior applications.

KoskiBond is suitable especially for trailer industry, e.g. solutions for bonded floor and wall constructions, bus building industry, railway carriage manufacturing, delivery vans e.g. solutions for bonded floors and linings, sandwich based panel constructions.



MULTI USE

EASY
MACHINING

EASY TO USE



Excellent bonding properties e.g.
Polyurethane / Epoxy adhesive



Smooth surface. Slip resistant wire
mesh pattern and other surface
patterns are available upon request.



High surface tension of the
KoskiBond coating supports high
adhesion values.



Easy to keep clean and easy to machine



Easy to paint, suitable for many
paint types

**KOSKISEN**

KoskiBond



Technical specifications

Base plywood	Koskisen Finnish birch plywood
Bonding	Phenolic resin according to EN 314-2/ class 3 exterior conditions. Formaldehyde emission levels of panels fulfil REACH requirements $\leq 0,062$ mg/m ³ (EN 717-1) Class E05 CARB Phase II, ULEF (Ultra Low Emitting Formaldehyde)
Coating	Customised overlay film, impregnated with modified phenolic resin. Standard colour is reddish brown. On request light grey for painting applications. Colour variations between different production lots and between individual panels are possible.
Standard thicknesses	9, 12, 15, 18, 21, 24, 27 and 30 mm Other thicknesses on request.
Standard sizes	1250 x 2500 mm 1525 x 3050 mm Other sizes on request
Density	Approx 700 kg/m ³
Edge treatment	As standard without edge sealing, available on request.
Fire classification	E17 I18R11 Type Approved FMVSS 302 Approval 95/28/EC Approval for vehicle floors
Machining	Drilling of holes edge machining like T&G, chamfer and rebate on request.
Other data	Detailed technical values can be found in Koskisen's Declaration of Performance (DoP). Please visit Koskisen website.

Sustainability

Koskisen's products are safe for their intended use and comply with all applicable quality, environmental, and product requirements. The focus areas of product development are improving the long service life, renewability, safety, and traceability of products.

Read more: koskisen.com/sustainability

Additional information

Wood is a living material and every panel is unique. Therefore a photograph or a sample piece cannot represent a full sized panel as regards colours, shades, figure, knots etc. Please note that a slight colour variation is accepted between panels.

The information, although based on extensive testing, is intended as a guideline only and comes without warranty. We reserve the right to amend specifications without notice. Any defects other than those caused by clearly verified production or service faults by the supplier are the responsibility of the user. Any claim for compensation is limited to the value of the defective panels. The Seller makes no guarantee that the goods are fit for a particular purpose, unless it provides a written declaration of their suitability.



Koskisen Panel Industry

Tehdastie 2, 16600 Järvelä, FINLAND
tel. +358 20 553 41
koskisen.com

