


Vehicle products by Koskisen plywood

FLOORS

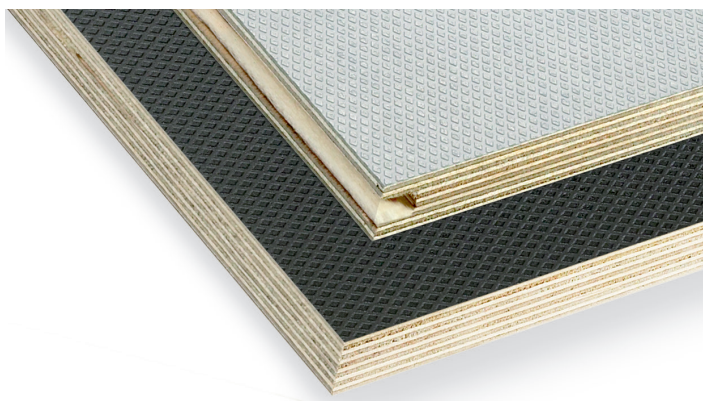

KoskiCarat

- Coated birch plywood imprinted with thousands of small raised diamond shapes
- Film weights from 220 g/m² to 440g/m², dark brown, light or dark grey, silver grey
- Thickness: 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm

KoskiCrown

- Coated birch plywood imprinted with circle crown pattern
- Film weights 220/m² to 440g/m², dark brown, black, light or dark grey, silver grey
- Thickness 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm




KoskiDeck

- Coated birch plywood with a slip resistant wire mesh pattern
- Film weights from 120g/m² up to 440g/m², dark brown, light and dark grey
- Thickness: 6,5 - 30 mm
- Panel sizes up to 1880 x 4000 mm


KoskiGranite

- Coated birch plywood or chipboard imprinted with mesh, crown, carat or ruby pattern
- Multicolor special coating
- Thickness: 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm

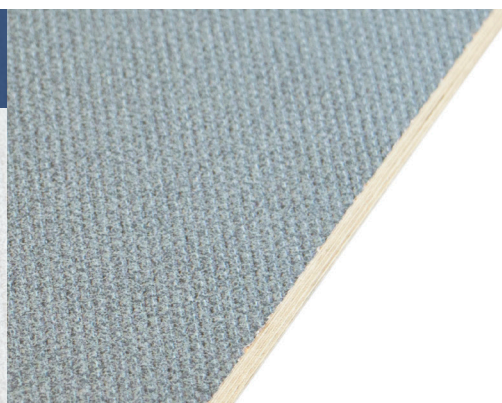

Vehicle products by Koskisen plywood

FLOORS

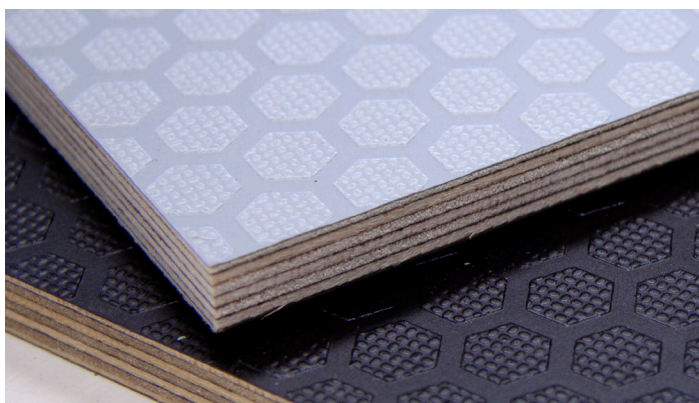


KoskiRuby

- Coated birch plywood imprinted with a hexagonal ruby pattern
- Film weights 220g/m² to 440g/m², dark brown, black, light or dark grey, silver grey
- Thickness: 9 - 30 mm
- Panel sizes up to 1880 x 4000 mm


KoskiDiamond

- Coated birch plywood imprinted with various diamond embossing
- Film weights from 220g/m² to 800g/m²
- Thickness: 9 - 30 mm
- Panel sizes up to 1525 x 3050 mm

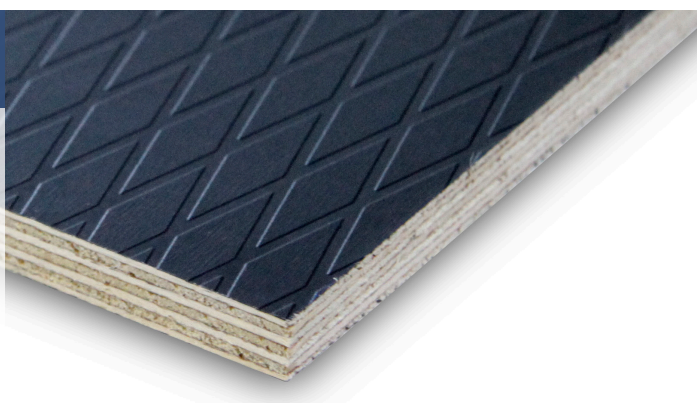

KoskiBond F

- Coated birch plywood with fire properties combined with good adhesion properties
- Fire certificate EN 45545-2 (08/2013) fulfills R10 Hazard level HL3
- Thickness: 4 - 30 mm
- Panel sizes up to 1525 x 3050 mm

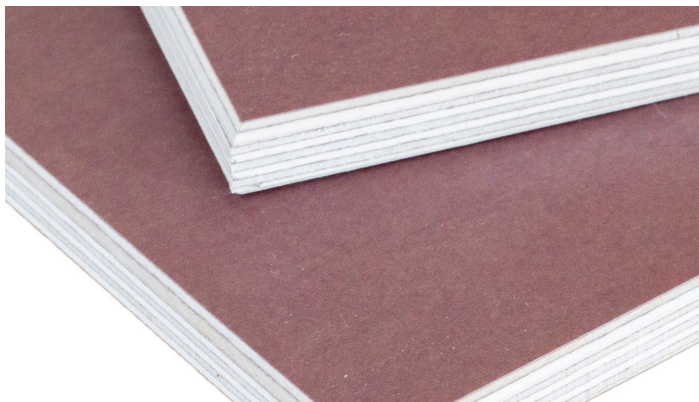

KoskiFutura Antislip

- Birch plywood coated with glass fibre reinforced plastic
- Durable slip resistance surface black or grey
- Thickness 9 - 30 mm
- Panel Sizes up to 1525 x 3600 mm




•••••
Koskisen

Tehdastie 2 | 16600, Järvelä

p. 020 553 41 | info@koskisen.com

Vehicle products by Koskisen plywood

FLOORS

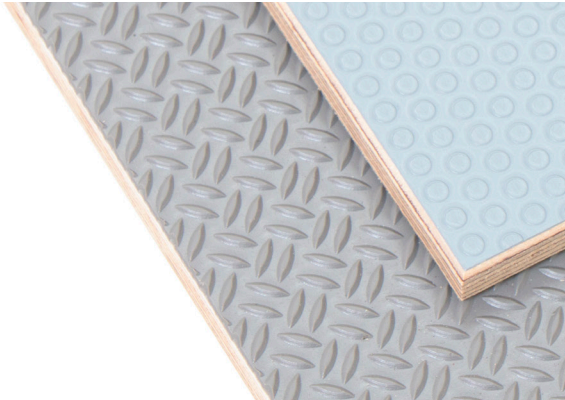

KoskiFutura Textured

- Plastic coated birch plywood
- Thickness: 4 - 30 mm
- Panel sizes up to 1525 x 3600 mm

KoskiSound

- Birch plywood with 4 mm sound barrier in the middle of the board
- Thickness 12 - 21 mm
- Available also film faced
- Panel sizes up to 1450 x 3000 mm



KoskiDuo

- Plastic coated birch plywood with rice pattern
- Grey color like RAL 7004
- Thickness 6,5 - 30 mm
- Panel sizes up to 1525 x 3600 mm



KoskiSound F

- Coated birch plywood fulfilling the demanding requirements of EN 45545-2
- Thickness: 12 - 30 mm
- Panel sizes: 1220 x 2400/2440 mm and 1450 x 3000 mm
- Achieves R10 the Hazard Level HL3



Koskisen

Tehdastie 2 | 16600, Järvelä
p. 020 553 41 | info@koskisen.com

For more detailed information please check the available product leaflets on our web page www.koskisen.com.



2412-CPR-1301-01



PEFC 02-34-12



FSC
www.fsc.org
FSC® C116522