


KoskiFutura

Textured

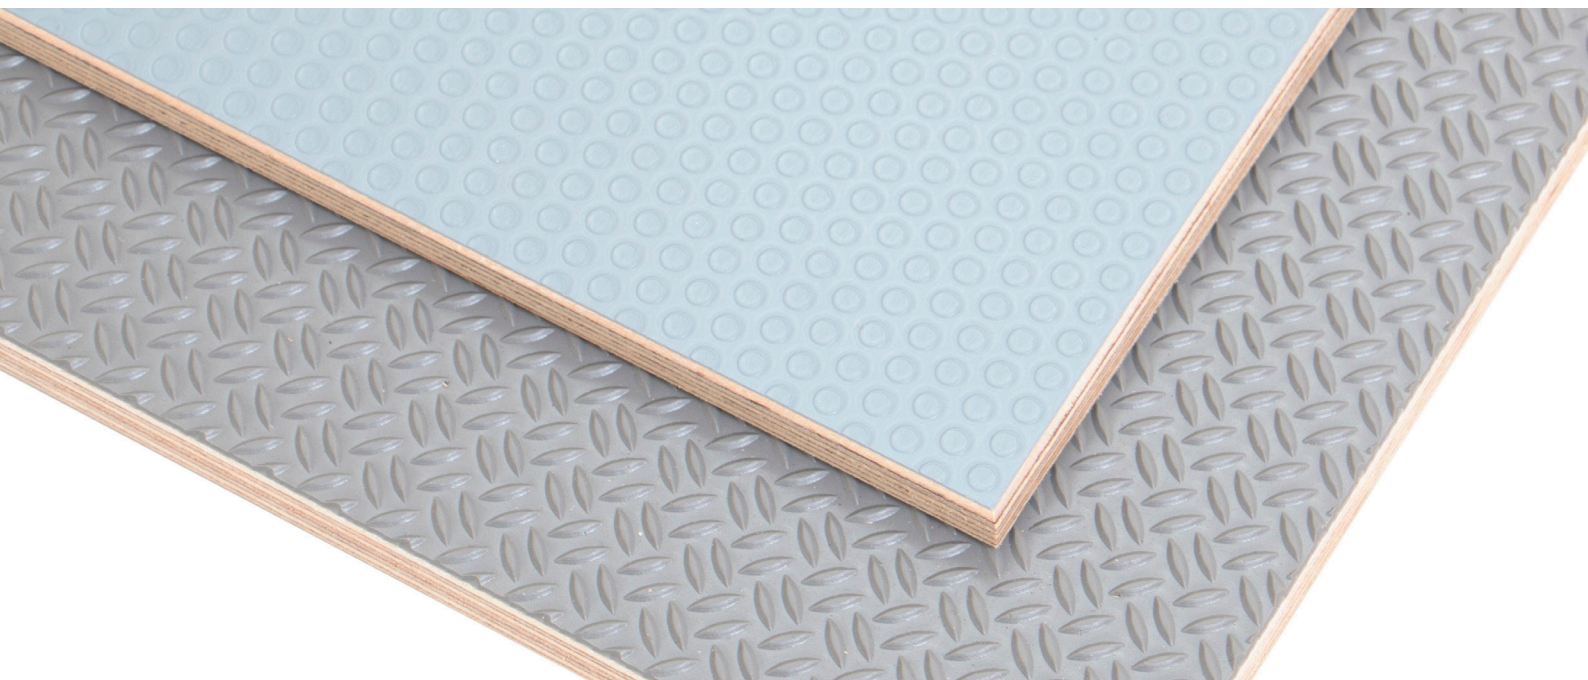

With a durable slip-resistant plastic coating

KoskiFutura Textured is strong birch plywood coated with a slip-resistant plastic coating. The tough and elastic polypropylene surface maintains its original colour over the years even when exposed to changing weather conditions. The coating also provides an easy to clean hygienic surface.

Strong and rigid birch plywood combined with a tough slip resistant coating make KoskiFutura Textured an ideal flooring material for the various needs of transport and construction industries. The elastic and durable coating protects the plywood against moisture penetration.

KoskiFutura Textured is suitable especially for vehicle floors, terrace floors, sports hall and play ground facilities, offices, shops and exhibitions.



ANTISLIP



WEAR
RESISTANT






EASY TO
CLEAN



ECO-
FRIENDLY



EASY
MACHINING

-  Decorative slip resistant surface
-  Wear resistant surface
-  Environmentally friendly product (does not contain any chlorine derivatives)



KOSKISEN

KoskiFutura

Textured



Technical specifications

Base plywood	Koskisen Finnish birch plywood
Bonding	Phenolic resin according to EN 314-2/ class 3 exterior conditions Formaldehyde emission levels of panels fulfil requirements of Class E1 (EN13986), CARB Phase II, ULEF (Ultra Low Emitting Formaldehyde)
Coating	Plastic based coating with slip resistant surface incorporates UV-resistant pigments. Coating is bonded to plywood with elastic two component glue meeting D4 requirements for exterior applications, EN 204
Standard thicknesses	Autofloor PP 4, 6.5, 9, 12, 15, 18, 21, 24, 27 and 30 mm DUO 9, 12, 15, 18, 21, 24, 27 and 30 mm Other thicknesses on request.
Standard sizes	Autofloor PP 1500/1525 x 3000/3050/3600 mm DUO 1500/1525 x 3000/3050/3600 mm Other sizes on request.
Density	Approx 700 kg/m ³
Edge treatment	Acrylic paint against moisture pick up
Wear resistance	Taber value 2350 - 5400 R, depending on the coating
Machining	Drilling of holes edge machining like T&G, chamfer and rebate on request.
Other data	Detailed technical values can be found in Koskisen's Declaration of Performance (DoP). Please visit koskisen.com/download .

Additional information

Environment

Our raw material, wood is an ecological and renewable material and it stores carbon during its whole life cycle. Koskisen plywood products are manufactured in Finland according to the strictest sustainability principles. Koskisen is a pioneer in the Finnish forest industry in paying attention to the environment and the wood's supply chain is always known in detail. Finnish forests are primarily privately owned and the owners are guided by a strong commitment to long-term forestry and forest cultivation. Yearly, Finnish forests grow more than they are harvested. This guarantees a sustainable and environmentally sound raw material.

Additional information

Wood is a living material and every panel is unique. Therefore a photograph or a sample piece cannot represent a full sized panel as regards colours, shades, figure, knots etc. Please note that a slight colour variation is accepted between panels.

The information, although based on extensive testing, is intended as a guideline only and comes without warranty. We reserve the right to amend specifications without notice. Any defects other than those caused by clearly verified production or service faults by the supplier are the responsibility of the user. Any claim for compensation is limited to the value of the defective panels. The Seller makes no guarantee that the goods are fit for a particular purpose, unless it provides a written declaration of their suitability.



Koskisen Panel Industry

Tehdastie 2, 16600 Järvelä, FINLAND
tel. +358 20 553 41
koskisen.com

